




TYAN S2880 SOCKET 940

1.190,00 PLN

Exkl. Steuern:
967,48 PLN

Product Images

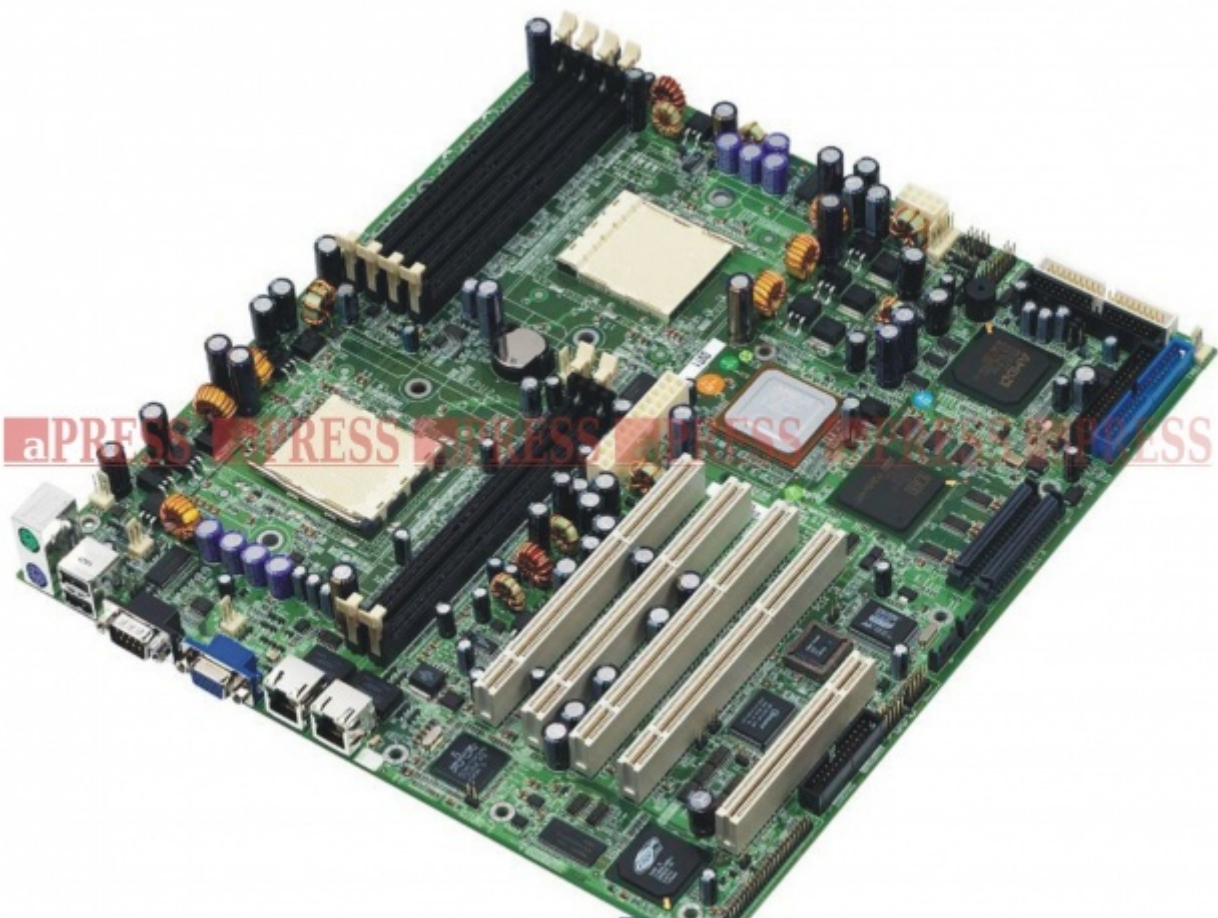

Beschreibung

TYAN S2880 SOCKET 940

- Dual μPGA 940-pin ZIF sockets
- Supports up to two AMD Opteron™ processors
- Two onboard 3-phase VRMs
- 128-bit DDR dual-channel memory controller

- • (integrated in CPU)
- Chipset
- • AMD-8131™ HyperTransport™ PCI-X Tunnel
- • AMD-8111™ HyperTransport™ I/O Hub
- • Winbond™ W83627HF Super I/O ASIC
- • Analog Devices ADM1027 Hardware Monitoring IC
- Memory
- • 128-bit DDR memory bus
- • Six 184-pin 2.5-Volt DDR DIMM sockets
- - four controlled by CPU1 and two on CPU2
- • Supports up to 12GB of Registered DDR
- • Supports ECC type memory modules
- • Supports PC3200 / 2700 / 2100 / 1600 DDR
- Expansion Slots
- • Two independent PCI-X buses
- • Two 64-bit 66/33 MHz (3.3-volt) PCI-X slots
- - from PCI-X bridge A
- • Two 64-bit 133/100/66/33 MHz (3.3-volt) PCI-X slots - from PCI-X bridge B (closer to CPUs)
- • One Legacy 32-bit 33MHz (5-volt) PCI slot
- • Total of five usable slots
- Integrated I/O
- • One floppy connector
- • Two 9-pin serial ports
- - one connector and one header
- • One 25-pin SPP/ECP/EPP parallel header
- • Four USB ports (two rear and two header)
- System Management
- • Seven 3-pin fan headers with tachometer
- monitoring
- • Five fan headers with (PWM) speed control
- • One 2-pin Chassis Intrusion header
- • Temperature, voltage and fan monitoring
- Integrated Enhanced IDE Controller
- • Provides two IDE dual-drive ports for up to four
- EIDE devices
- • Supports up to four enhanced IDE devices
- Integrated LAN Controllers
- • Broadcom BCM5704C dual-channel GbE LAN
- - Two RJ-45 LAN connectors with LEDs
- - Connected to PCI-X Bridge A
- • Two Front Panel LED headers
- Integrated PCI Graphics
- • ATI® RAGE™ XL 8MB PCI graphics controller
- Integrated SATA Controller
- • Promise® PDC20378 SATA/SATA RAID
- accelerator
- • Two Serial ATA 1.0 and one Parallel
- ATA-133/100 channels
- • Supports up to two SATA and two ATA-133/100
- IDE drives
- • Supports 48-bit LBA for drives larger than 128GB

- • Connected to legacy 32-bit 33MHz PCI bus
- Integrated Dual Channel SCSI (option)
- • LSI® 53C1030 U320
- SCSI controller
- • Dual-channel U320 SCSI
- • Connects to PCI-X Bridge A
- • LSI® ZCR (Zero Channel RAID)
- support (SCSI Interface Steering
- Logic)
- Intelligent Platform Management Interface Header
- • TYAN Server Management Daughter card
- (optional) supports features listed below via
- IPMI header (SMDC/TSO Support)
- • QLogic™ Zircon Baseboard Management
- Controller (BMC) based on powerful ARM7
- technology
- • Tailored for IPMI highest 1.5 Spec.
- • Supports KCS and BT styles
- • Flexible Windows or Linux Management Solution
- • Supports RMCP and SNMP protocols
- • Supports ASF standard and EMP
- • I2C serial multi-master controllers and UARTs
- • Build-in IPMB connector
- • Remote power on/off and reset support
- (IPMI-over-LAN)
- BIOS
- • AMI® BIOS 8.0 on 4Mbit LPC Flash ROM
- • Supports ACPI 1.0b & 2.0
- • Supports Serial Console Redirect
- • 48-bit LBA Support
- • Supports PXE via Ethernet
- • Supports USB device boot
- Form Factor
- • Extended ATX footprint (13" x 12")
- • EPS12V (24pin + 8pin) power connectors
- • Serial (one) and VGA (one) connectors
- • Stacked USB 1.1 (two) connectors
- • Stacked PS/2 keyboard and mouse ports
- • Two RJ-45 side-by

Additional Information

Preis	1.190,00 PLN
Produktzustand	Erneuert
Hersteller	Tyan
Sockel	940
RAM	DDR
PCI-X	4
PCI	1
Garantie	2 Jahre Garantie

